




Loudspeaker for MIL-Applications with Volume Control Prepared for Headset Connection

type number 00766

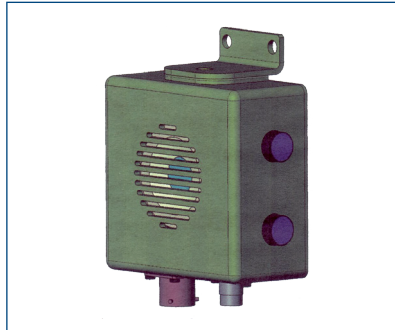

Main Feature:

Audio frequency loudspeaker for use in intercom systems in:

- armoured vehicles
- military shelters
- ships

Mounting with thread bolt, flange or mounting material set.

Option:

- preamplifier
- handset / headset junction box NF10B1L0
- fixed connection cord
- mounting material set

Technical Data:

Output power:	2 W, 6 Ω
Volume control:	integrated
Input signal:	0 dBm
Junction box AF+ power supply:	SJT00RT12-35SN014
Housing:	AlMg3, painted RAL 6031F9
Dimensions:	110 mm x 105 mm x 60 mm
Weight:	850 g incl. fixture

Environmental Conditions:

Temperature:	-40 °C - +70 °C (80 °C) operating (storage)
EMI:	acc. to VG 95373 GWK 2
Protection:	IP 65 waterproof version IP 35 on front side with loudspeaker
Vibration:	5 g, 10 Hz to 500 Hz
Shock:	25 g, 6 ms
Humidity:	95 %

Ask for further technical information!

Functional or interface modifications can be realized on request. Each configuration change causes a new type number.